



M10

Plate heat exchanger

Applications

General heating and cooling duties. Heating by means of steam.

Standard design

The plate heat exchanger consists of a pack of corrugated metal plates with portholes for the passage of the two fluids between which heat transfer will take place.

The plate pack is assembled between a fix frame plate and a movable pressure plate and compressed by tightening bolts. The plates are fitted with a gasket which seals the interplate channel and directs the fluids into alternate channels. The number of plates is determined by the flow rate, physical properties of the fluids, pressure drop and temperature program. The plate corrugations promote fluid turbulence and support the plates against differential pressure.

The plate and the pressure plate are suspended from an upper carrying bar and located by a lower guiding bar, both of which are fixed to a support column.

Connections are located in the frame plate or, if either or both fluids make more than a single pass within the unit, in the frame and pressure plates.

Typical capacities

Liquid flow rate

Up to 50 kg/s (800 gpm), depending on media, permitted pressure drop and temperature program.

Water heating by steam

0.7 to 3.0 MW

Plate types

M10B, M10M and M10BD, double wall plates.

Frame types


FM, FG and FD

Working principle

Channels are formed between the plates and the corner ports are arranged so that the two media flow through alternate channels. The heat is transferred through the plate between the channels, and complete counter-current flow is created for highest possible efficiency. The corrugation of the plates provides the passage between the plates, supports each plate against the adjacent one and enhances the turbulence, resulting in efficient heat transfer.



M10-BFG

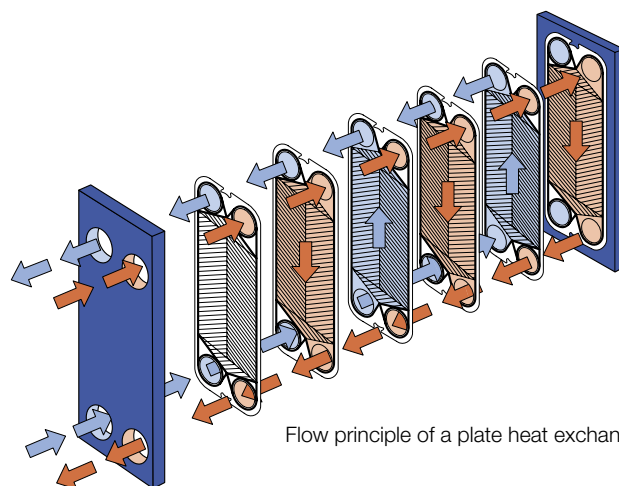

Flow principle of a plate heat exchanger

STANDARD MATERIALS

Frame plate

Mild steel, Epoxy painted

Nozzles

Carbon steel

Metal lined: Stainless steel, Titanium

Rubber lined: Nitrile, EPDM

Plates

Stainless steel Alloy 316/Alloy 304, Titanium, Alloy 254 SMO, Alloy C-276

Gaskets (Clip-on, glued)

M10B Nitrile, EPDM, HNBR, EPDMF, Viton®G, AL-EPDM

M10M Nitrile, EPDM, HeatSeal F™, HNBR, EPDMF, Viton®G, AL-EPDM

TECHNICAL DATA

Pressure vessel codes, PED, ASME, pvcALS™

Mechanical design pressure (g) / temperature

FM pvcALS™	1.0 MPa / 180°C
FM PED	1.0 MPa / 180°C
FG pvcALS™	1.6 MPa / 180°C
FG PED	1.6 MPa / 180°C
FG ASME	150 psig / 356°F
FD PED	2.5 MPa / 180°C
FD ASME	389 psig / 482°F

*) Frame FG also approved for 1.2 MPa / 200°C to allow use in steam systems without safety valves.

CONNECTIONS


FM pvcALS™	Size 100 mm	DIN/GB/GOST PN10, ASME Cl.150, JIS 10K
FM PED	Size 100 mm	DIN PN10, ASME Cl. 150
FG pvcALS™	Size 100 mm	DIN/GB/GOST PN10, ASME Cl. 150, JIS 10K
FG PED	Size 100 mm	DIN PN16, ASME Cl. 150
FG ASME	Size 4"	ASME Cl.150
FD PED	Size 100 mm	DIN PN25/ASME Cl.150 / 300
FD ASME	Size 4"	ASME Cl. 300

PCT00099EN 0809

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com

Dimensions

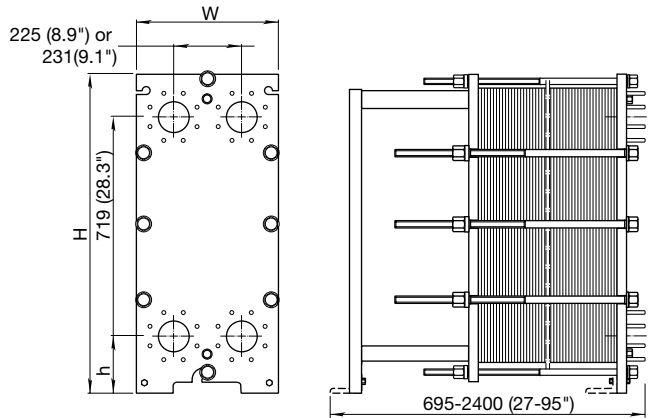

Measurements mm (inch)

Type	H	W	h
M10-FM	1084 (42 11/16")	470 (18 1/2")	215 (8 15/32")
M10-FG	1084 (42 11/16")	470 (18 1/2")	215 (8 15/32")
M10-FD	981 (38 5/8")	470 (18 1/2")	131 (5 1/4")
M10-FD ASME	1084 (42 11/16")	470 (18 1/2")	215 (8 15/32")

The number of tightening bolts may vary depending on pressure rating.

Maximum heat transfer surface

M10B 90 m² (970 sq. ft)

M10M 60 m² (650 sq. ft)

Particulars required for quotation

- Flow rates or heat load
- Temperature program
- Physical properties of liquids in question (if not water)
- Desired working pressure
- Maximum permitted pressure drop
- Available steam pressure

All rights reserved for changes in specifications without prior notification

GIAFLEX

GIA-S d.o.o., Industrijska cesta 5, 1290 Grosuplje, Slovenija
 Telefon: +386 1 7865 300, Telefax: +386 1 7863 568,
 info@gia.si, www.giaflex.com